




SYNLAWN®

Plant-Based Artificial Grass

PRODUCT SPECIFICATIONS

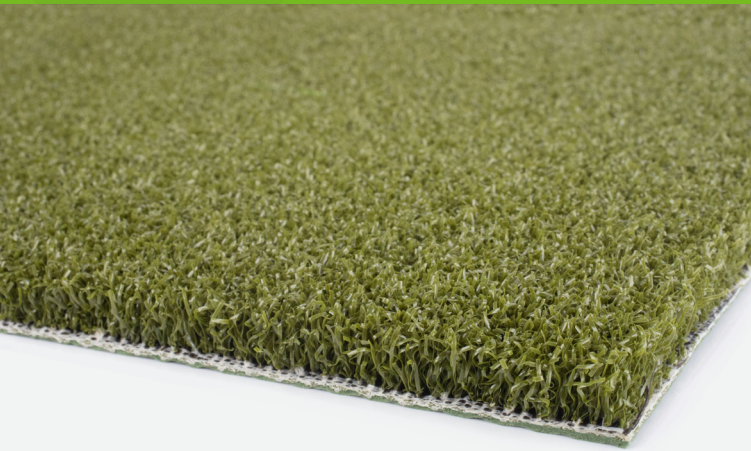

PRECISION PUTT


Remarkable performance with the most realistic ball roll makes this a true putting surface to improve your game. Built with nylon fibers and an embossed backing, this turf accepts shots like a champ and delivers a 10-12 on the Stimpmeter.

| | |
|------------------------|--|
| SKU | SG326 |
| Grass Zone Yarn/Color | Nylon / Verde |
| Grass Zone Denier | 4,200 / 8 |
| Thatch Zone Yarn/Color | - |
| Thatch Zone Denier | - |
| Grass Zone Yarn Shape | Textured Diamond |
| Finished Pile Height | 3/8" |
| Finished Pile Weight | 47 oz. |
| Backing | 13PP/18PET 2pt / 20oz. Embossed |
| Tuft Gauge | 3/16" |
| Total Weight | 84 oz. |
| Tuft Bind | > 8 lbs. |
| Permeability | - |
| Features | HeatBlock™ UV Stabilizers |
| Test Data | ASTM E108 CLASS A FIRE, D2859, E84, E648, F2765, CAL 1350 |

- LIMITED LIFETIME WARRANTY*
- 100% NYLON W/HEATBLOCK™ TECHNOLOGY
- REALISTIC CHECK/ROLL ON PITCH/CHIPS
- STIMP METER SPEED: 10-12

INSTALLATION DETAILS AVAILABLE AT

CADdetails
MasterSpec®

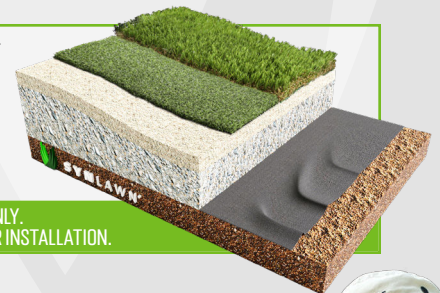

NOT TO SCALE. FOR ILLUSTRATION ONLY.
CONTACT YOUR LOCAL SYNLAWN FOR INSTALLATION.

ASK FOR A...



Dave Pelz



SYNLAWN®
a sportgroup company

SYNLAWN.COM • SYNLAWNGOLF.COM • (866) 796-5296



MADE IN
 U. S. A.

SPECIFICATIONS SUBJECT TO CHANGE

03.17.2024

**SYNLAWN**[®]The **Greenest** Turf on Earth[™]**PRECISION PUTT**

| | | | |
|----------------------------|------------------|---------------------------------|-------------------|
| Primary Yarn Polymer | Nylon | Primary Backing | 13PP/18PET 2-Part |
| Yarn Cross Section | Textured Diamond | Coating Type | 20 oz. Embossed |
| Standard Color | Verde | PE Yarn Denier / Ends | 4,200 / 8 |
| Fabric Construction | Tufted | Texturized Thatch Denier / Ends | - |
| Second Yarn Polymer Thatch | - | Warranty Period | Limited Lifetime |
| Secondary Yarn Color | - | | |

| FINISH FABRIC | ENGLISH SYSTEM | | ASTM TEST |
|------------------------------|-----------------------|--------------------|-----------|
| | Nominal Specification | Value | Units |
| Pile Height (Nominal) | 3/8 | inches | D-5823 |
| Face Weight | 47 | oz/yd ² | D-5848 |
| Total Fabric Weight | 84 | oz/yd ² | D-5848 |
| Primary Backing Weight | 6 | oz/yd ² | D-5848 |
| Secondary Coating Weight | 20 | oz/yd ² | D-5848 |
| Tuft Bind | > 8 | lbs. | D-1335 |
| Grab Tear Strength (Average) | > 200 | lbs. | D-5034 |
| Total Yarn Linear Density | 4,200 | Denier | D-1577 |
| Elongation to Break | > 30 | % | D-2256 |
| Yarn Breaking Strength | > 20 | lbs. | D-5793 |
| Machine Gauge | 3/16 | inches | D-5793 |
| Flammability | Passed | - | D-2859 |
| Water Permeability | - | in/hr | D-1551 |
| Fabric Width | 15 | ft | - |

**SYNLAWN**[®]
a sportgroup company

SYNLAWN.COM • SYNLAWNGOLF.COM • (866) 796-5296

THEGREENESTTURFONEARTH.COM

**MasterSpec**[®]

CADETAILLS.COM

SPECIFICATIONS SUBJECT TO CHANGE

03.17.2024